

# In the United States Patent and Trademark Office

Applicant(s): T. Allan Hamilton

Title: "Improved Standby Mode for Infrared Data Transceivers"

Docket No.  
CLB5-B73

## Patent Application Cover Sheet

HONORABLE COMMISSIONER OF PATENTS AND TRADEMARKS

Washington, D.C. 20231

Sir:

Please file the following enclosed patent application papers:

Specification, Claims and Abstract: No. of Sheets 15

6 Sheets of Informal Drawing.

Declaration.

Assignment.

Small Entity Declaration Of Inventor

Return Receipt Postcard.


A check in the amount of \$ 395.00 to cover the filing fee as calculated below:

FOR:	# FILED	# EXTRA
BASIC FEE		
TOTAL CLAIMS	-20 =	0
INDEPENDENT CLAIMS	-3 =	0
MULTIPLE DEPENDENT CLAIMS PRESENTED		

SMALL ENTITY	
RATE	FEE
	\$ 395.00
x \$ 11.00	\$ .00
x \$ 40.00	\$ .00
+ \$ 130.00	\$ .00
TOTAL	\$ <u>395.00</u>

OTHER THAN A SMALL ENTITY	
RATE	FEE
	\$ 770.00
x \$ 22.00	\$ .00
x \$ 80.00	\$ .00
+ \$ 260.00	\$ .00
TOTAL	\$ .00

Very respectfully,

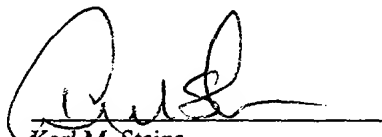  
Karl M. Steins  
Registration No. 40,186  
Steins & Associates  
2333 Camino del Rio South #258  
San Diego, CA 92108  
(619) 692-2004

PATENT APPLICATION

CLB5-B73

**SYSTEM AND METHOD FOR PROVIDING AN IMPROVED STANDBY  
MODE FOR INFRARED DATA TRANSCEIVERS**

Inventor: T. Allan Hamilton  
San Jose, CA; Canada

SYSTEM AND METHOD FOR PROVIDING AN IMPROVED STANDBY MODE  
FOR INFRARED DATA TRANSCEIVERS

BACKGROUND OF THE INVENTION

1. Field of the Invention

This invention relates generally to infrared communications systems and, more specifically, to a System and Method for Providing an Improved Standby Mode for Infrared  
5 Data Transceivers.

2. Description of Related Art

As technology becomes continually more accessible to the “common man,” the ability to use, store, transfer and otherwise manipulate information has become the focus of most  
10 businesses as well as for the individual consumer. Access to the information resources is commonly by some sort of network system, including World Wide Web, “Intranets”, local area networks, wide area networks, as well as corporate databases.

While the conventional method for connecting to one of these information networks has been via cable and wire, as the reliance upon connectivity to information has deepened, the desire to gain such access from mobile or portable devices has strengthened. These portable devices, such as Personal Digital Assistants, hand-held computers, cellular  
5 telephones, and even digital cameras are now being connected to each other and to networks via Infrared Data Communications. In fact, it is virtually impossible to purchase a notebook computer today that does not include an Infrared Data Communications assembly resident within it.

One drawback of these portable devices or appliances is their inherent  
10 dependency upon portable power sources (i.e. batteries of some sort). As functionality is added to the device, so is demand upon the portable power source, therefore any way of reducing the demand upon the portable power source is extremely desirable. One particular system that can place a significant demand upon the portable power source is the Ir transceiver system – Figure 1 provides pertinent details about how these systems function. Figure 1 is an illustration of a pair  
15 of prior Ir-enabled appliances 10 and 12 in standby mode. Standby mode is that condition to which the appliance returns when the appliance is not actively engaged in Ir communications. Each appliance, comprises (in pertinent part) an Ir transceiver system 14 and 16 that is powered by power supply means 18 and 20 for powering the electronics and mechanical devices contained within the appliances 10 and 12. While the power supply means 18 and 20 may be  
20 external electrical power, the means 18 and 20 that is pertinent to this discussion is a portable

battery-type power supply means because its available charge is limited. The limited life span of the battery-type power supply means 18 and 20 is the focus of the present invention.

In the prior appliances 10 and 12, the Ir transceiver systems 14 and 16 operate in a constant, full-power demand condition, as demonstrated by the IrXS (Infrared transmission system) Power State indicators 22 and 24 (these are simply representations to indicate a power load condition – they are not intended to represent actual devices). The problem with the prior appliances 10 and 12 resides with the “standby” or “sleep” mode of the Ir transceiver systems 14 and 16. When in standby mode, as represented by balloons 26 and 28, there are no emissions from the systems 14 and 16; the systems 14 and 16 are simply monitoring their environment for a “discovery” signal. Discovery signals are Ir signals in a particular frequency band, currently established by the IrDA (Infrared Data Association) at 9600 baud, that one appliance 10 or 12 sends to another appliance to “wake up” the other appliance in preparation for the commencement of Ir communications. As illustrated by Figure 1, the prior appliances 10 and 12 are in full-power demand conditions 22 and 24, even though they are sleeping. Even though the transceiver systems 14 and 16 are performing no work beyond simply listening, they are imposing the same drain on the power supply means 18 and 20 that a fully active transceiver 14 and 16 would draw. As discussed earlier, any reduction in power demand will provide significant benefits to the user of these portable Ir-enabled appliances. What is needed, therefore, is a means for reducing the power drain on the power supply means 18, for example, when portable Ir-enabled appliances are in standby mode.

SUMMARY OF THE INVENTION

In light of the aforementioned problems associated with the prior systems and devices, it is an object of the present invention to provide a System and Method for Providing an Improved Standby Mode for Infrared Data Transceivers. It is a further object that the device and system  
5 include discovery signal receiver and power actuator module that consumes a fraction of the power of a conventional Ir transceiver system. The preferred device and system may be integral to a conventional Ir transceiver, or it may be a stand-alone system or device. It is a further object that the device and system activate full power to the Ir transceiver system upon recognition of an Ir discovery signal. It is another object that the power-up signal also be user-  
10 initiated. It is a still further object that the switch means for providing full power to the Ir transceiver system be in an open position while the Ir-enabled appliance is in a standby or sleep mode. It is a still further object that the device and system recognize a 9600 baud Ir discovery signal.

### BRIEF DESCRIPTION OF THE DRAWINGS

The objects and features of the present invention, which are believed to be novel, are set forth with particularity in the appended claims. The present invention, both as to its organization and manner of operation, together with further objects and advantages, may best be understood by reference to the following description, taken in connection with the accompanying drawings, of which:

Figure 1 is an illustration of a pair of prior Ir-enabled appliances in standby mode;

Figures 2A and 2B are illustrations of the operation of the improved standby mode of the present invention;

Figure 3 is an illustration of the power supply schematic of a typical prior Ir transceiver system;

Figure 4 is an illustration of a preferred low power discovery signal receiver and power actuator module of the present invention;

Figure 5 is an illustration of a preferred integrated low power discovery signal receiver and power actuator system of the present invention; and

Figure 6 is a schematic diagram of a preferred low power discovery signal receiver and integrated power actuator system of the present invention.

DETAILED DESCRIPTION  
OF THE PREFERRED EMBODIMENTS

The following description is provided to enable any person skilled in the art to make and use the invention and sets forth the best modes contemplated by the inventor of carrying out his invention. Various modifications, however, will remain readily apparent to those skilled in the art, since the generic principles of the present invention have been defined herein specifically to provide a System and Method for Providing an Improved Standby Mode for Infrared Data Transceivers.

The present invention can best be understood by initial consideration of Figures 2A and 2B. Figures 2A and B are illustrations of the operation of the improved standby mode system and method of the present invention. In Figure 2A, the appliance 10 has just sent a discovery signal 30 (represented by balloon 32) to the "sleeping" 34 Ir-enabled appliance 36 incorporating the system of the present invention. Until the discovery signal 30 is received and recognized as such by the Ir transceiver system 16, the IrXS (Ir transceiver system) power state 24 remains in a low-power demand condition, a condition which places a very minor draw on the power supply means 20.

Figure 2B reflects the transition that occurs within the appliance 36 once the discovery signal 30 has been received and recognized by the Ir transceiver system 16. As can be seen, once "discovered," the IrXS power state 24 switches to a full-power condition, thereby enabling the Ir transceiver system 16 to reply 38 to the other appliance 10 via Ir signal. Until discovered, therefore, the IrXS power state 24 is in a low power condition simply "listening" for



a discovery signal; after discovery, the IrXS power state 24 shifts to full power condition so that the transceiver system 16 can generate an Ir transmission.

Now turning to Figure 3, we can delve deeper into the prior state of the art in order to contrast it with the present invention. Figure 3 is an illustration of the power supply schematic of a typical prior Ir transceiver system 14. In pertinent part, the transceiver system 14 comprises an Ir transmitter 40 for transmitting Ir signals and an Ir receiver 42 for receiving incident Ir signals. Both the transmitter 40 and receiver 42 are powered by “analog power” 44; analog power 44 is simply a power takeoff from the appliance’s hardware that is segregated for use in analog devices (such as the Ir photodiodes) – the power is identical to that coming from the power supply means 18.

The Ir transmitter 40 and receiver 42 are controlled by and/or communicate with a signal processor 44 that encodes and decodes data passing between the transmitter 40/receiver 42 and a communications controller 46. The communications controller 46 then communicates with the central processing unit (CPU) or other systems elsewhere within the appliance. The signal processor 44 and communications controller 46 receive their power from “digital power” 48; digital power 48 is, again, simply a power takeoff from the appliance that is confined to use in digital devices. As shown also, the IrXS 22 is in a full-power condition, as previously described in connection with Figures 1 and 2.

Consideration of Figure 4 will provide additional detail regarding the innovation of the present invention; it is an illustration of a preferred low power discovery signal receiver and power actuator module 60 of the present invention. The improved Ir transceiver system 50

includes an Ir transmitter 40, Ir receiver 42, Signal Processor 44 and Communications Controller 46, similar to the prior transceiver system. In this novel system, however, the analog and digital components are powered by switched analog and switched digital power 52 and 54, respectively. The switched analog power 52 and switched digital power 54 are activated by switch means 56 to energize the analog 44 and digital power 48 to their respective components. The switch means 56 for energizing and de-energizing the analog 52 and digital 54 switched powers may be of a variety of conventional hardware and/or software combinations to provide, essentially, “on” and “off” control of the electrical power supply. Because the switched analog 52 and digital power 54 are configured to provide full power to the components of the transceiver system 50, they are powered by the full power branch 58. While the transceiver system 50 is in the sleep or standby mode, the switch means 56 is in an open condition and the switched analog 52 and digital power 54 are deactivated – full power to the transceiver system 50 is therefore switched off.

The innovation of the present invention lies in the discovery signal receiver and power actuator module 60. This module 60 comprises, in pertinent part, a simple Infrared receiver 62 and related discovery signal detection circuitry 64. The receiver 62 and circuitry 64 are configured to recognize incident Ir discovery signals (i.e. distinguishing them from other noise), and thereafter transmit a power-up signal 66 to the switch means 56. Once the power-up signal 66 is received by the switch means 56, the switched analog 52 and digital power 54 are activated to the transceiver system 50, and the transceiver system 50 is enabled for full Ir signal transmission and receipt.

The discovery signal receiver and power actuator module 60 is powered by a low-power branch 68; it should be understood that the low power 68 and high power branches 58 are simply illustrations to assist in the understanding that the discovery signal receiver and power actuator module 60 draws only a small amount of power compared to the demand by the Ir transceiver system 50. Furthermore, it should be appreciated that the power-up signal 66 may be manually overridden to either the "on" or "off" condition, in order to provide the user with additional flexibility in power demand control and system functionality.

If we now turn to Figure 5, we can review yet another preferred embodiment of the present invention. Figure 5 is an illustration of a preferred integrated low power discovery signal receiver and power actuator system of the present invention. In this embodiment, the Ir transceiver system 70 comprises an alternate signal processor 72, which includes integrated discovery signal detection circuitry 64 connected to the low-power branch 68. As such, the conventional Ir receiver 42 is able to operate (controlled by the discovery signal detection circuitry 64) in a low-power standby state. When the circuitry 64 recognizes a discovery signal received by the Ir receiver 42, it, in cooperation with the communications controller 46, generates the power-up signal 66 for activating the switch means 56 to energize the switched analog 52 and digital power 54. In contrast, the advantage of this embodiment is that only a single Ir receiver 42 is required; a simple operational modification to the existing transceiver system components is all that is necessary. The advantage of the system described in connection with Figure 4 is that it enables a conventional Ir-enabled appliance to be retrofitted to operate in a low-power standby mode.

Figure 6 is a schematic diagram of a preferred low power discovery signal receiver and integrated power actuator system of the present invention, such as the system described above in connection with Figure 5. In this circuit, the UART operates in a low-power condition to provide surveillance for a discovery signal - in this case a 9600 baud Ir signal. It should be appreciated that while a conventional Ir transceiver system consumes in excess of 5 (five) milliamperes (mA) of current, the low-power standby circuitry consumes much less than 1 (one) mA of current. In fact, the standby power consumption is in the range of one-tenth of the conventional power consumption.

Those skilled in the art will appreciate that various adaptations and modifications of the just-described preferred embodiment can be configured without departing from the scope and spirit of the invention. Therefore, it is to be understood that, within the scope of the appended claims, the invention may be practiced other than as specifically described herein.

## CLAIMS

### What Is Claimed Is:

1. A device for reducing power consumption in infrared-enabled appliances having power supply means and transceiver system means forming a circuit including switch means, comprising:

a discovery signal receiver and power actuator module, said module configured to recognize incident Ir discovery signals and responsively activate said switch means.

2. The device of Claim 1, wherein said discovery signal receiver and power actuator module further comprises:

an infrared receiver; and

discovery signal detection circuitry configured to recognize infrared discovery signals incident to said receiver and emit a power-up signal to said switch means.

3. The device of Claim 2, wherein said discovery signal receiver and power actuator module consumes less than one milliamperere of electrical current.

4. The device of Claim 2, wherein said power-up signal can be instigated by user input.

5. The device of Claim 2, wherein said switch means defines an open condition and a closed condition, said closed condition being activated upon receipt of said power-up signal.

6. The device of Claim 5, wherein electrical power is supplied to said transceiver system means when said switch means is in said closed condition, and said power is interrupted to said transceiver system means when said switch means is in said open condition.

7. The device of Claim 5, wherein said transceiver system means can instigate said power-up signal.

8. The device of Claim 3, wherein said discovery signal comprises a 9600 baud infrared signal incident upon said infrared receiver.

9. A system for reducing power consumption in infrared-enabled appliances having power supply means and transceiver system means forming a circuit, comprising:

a low power standby module means for detecting incident Ir discovery signals, said circuit being responsive to said low power standby module means.

10. The system of Claim 9, wherein said transceiver system means defines a standby mode, and a full-power mode, said standby mode being activated by said low power standby module means.

11. The system of Claim 10, wherein said low power standby module means is integral to said transceiver system means.

12. The system of Claim 11, wherein said circuit further comprises switch means for switching between said standby mode and said full-power mode.

13. The system of Claim 12, wherein said switch means is responsive to a power-up signal.

14. The system of Claim 12, wherein said power-up signal is generated by said low power standby power module means in response to said detection of an infrared discovery signal.

15. A method for reducing power consumption in infrared-enabled appliances having power supply means and transceiver system means forming a circuit, comprising:

powering down said transceiver system means to a low power standby state;

detecting at least one incident Ir discovery signal; and

powering up said transceiver system means to a full power state.

**16.** The method of Claim 15, wherein said powering up is performed in response to said detecting.

**17.** The method of Claim 16, wherein said powering up is further performed in response to user input.

**18.** The method of Claim 16, wherein said detecting is performed by a discovery signal receiver and power actuator module means.

**19.** The method of Claim 18, wherein said detecting is performed by a discrete discovery signal receiver and power actuator module means.


**20.** The method of Claim 18, wherein said detecting is performed by an discovery signal receiver and power actuator module means that is integral to said transceiver system means.

ABSTRACT OF THE DISCLOSURE

A System and Method for Providing an Improved Standby Mode for Infrared Data Transceivers is disclosed. Standby Mode for Infrared Data Transceivers. The device and system of the present invention includes a discovery signal receiver and power actuator module  
5 that consumes a fraction of the power of a conventional Ir transceiver system. The preferred device and system may be integral to a conventional Ir transceiver, or it may be a stand-alone system or device. Furthermore, the device and system are configured to activate full power to the Ir transceiver system upon recognition of an Ir discovery signal, and this power-up signal might also be user-initiated in some preferred embodiments. The preferred switch means for  
10 providing full power to the Ir transceiver system is in an open position while the Ir-enabled appliance is in a standby or sleep mode. The preferred device and system recognize a 9600 baud Ir discovery signal.



502750-1515160

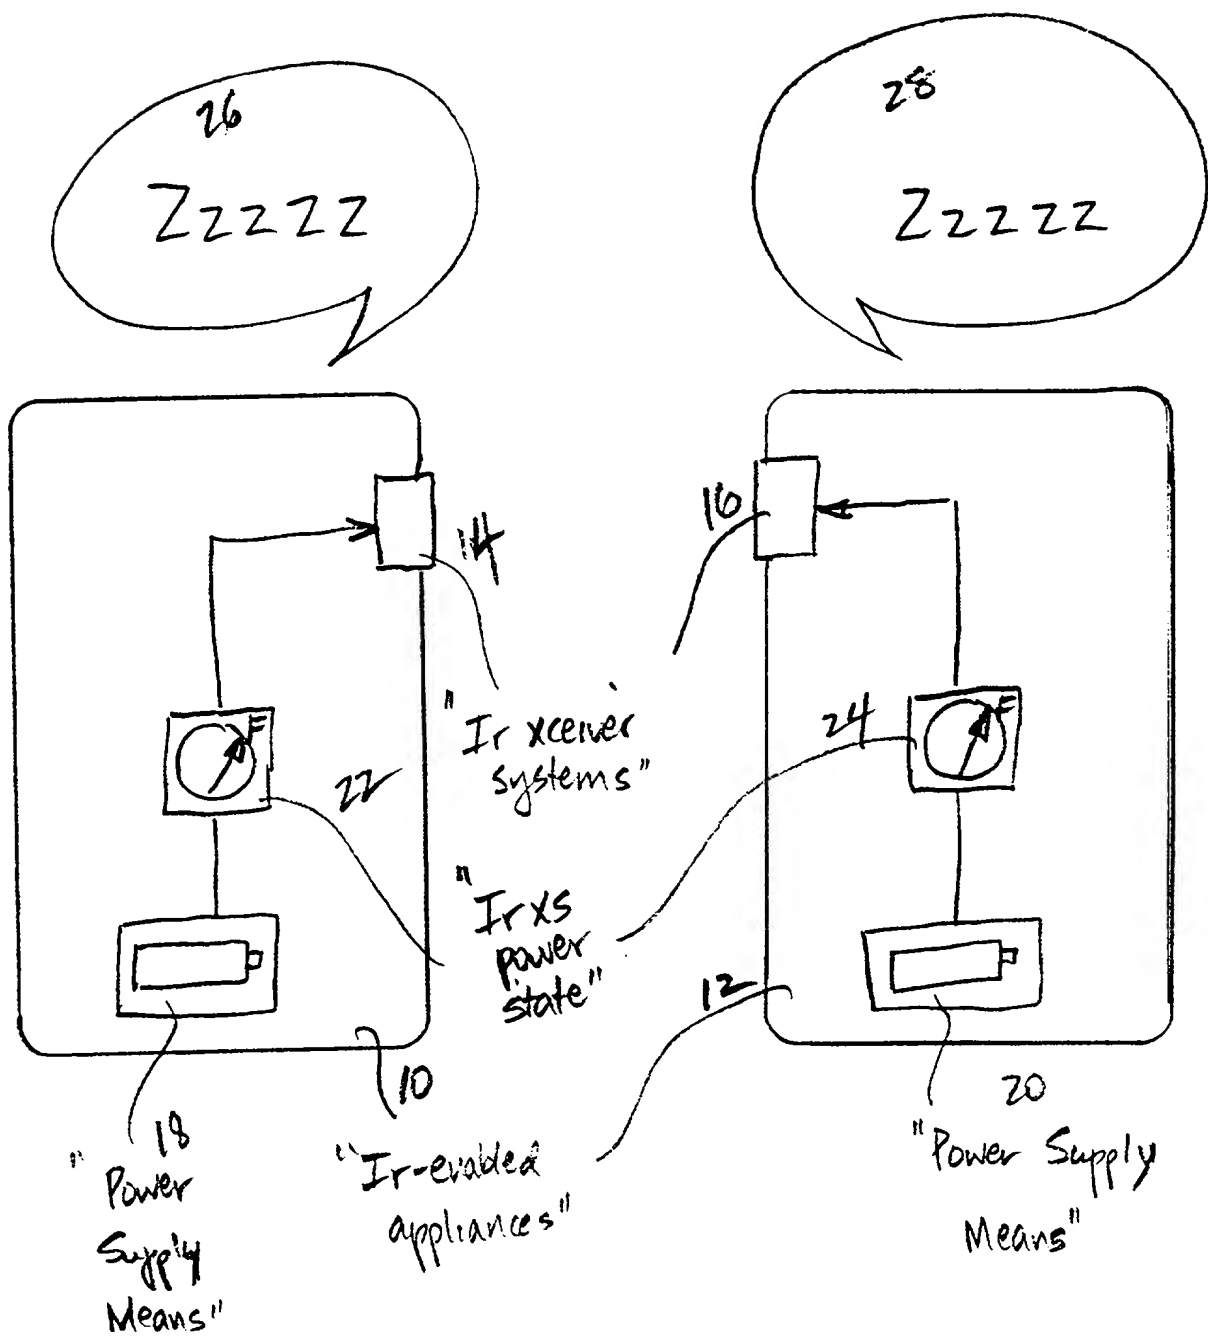

PRIOR ART

FIGURE 1

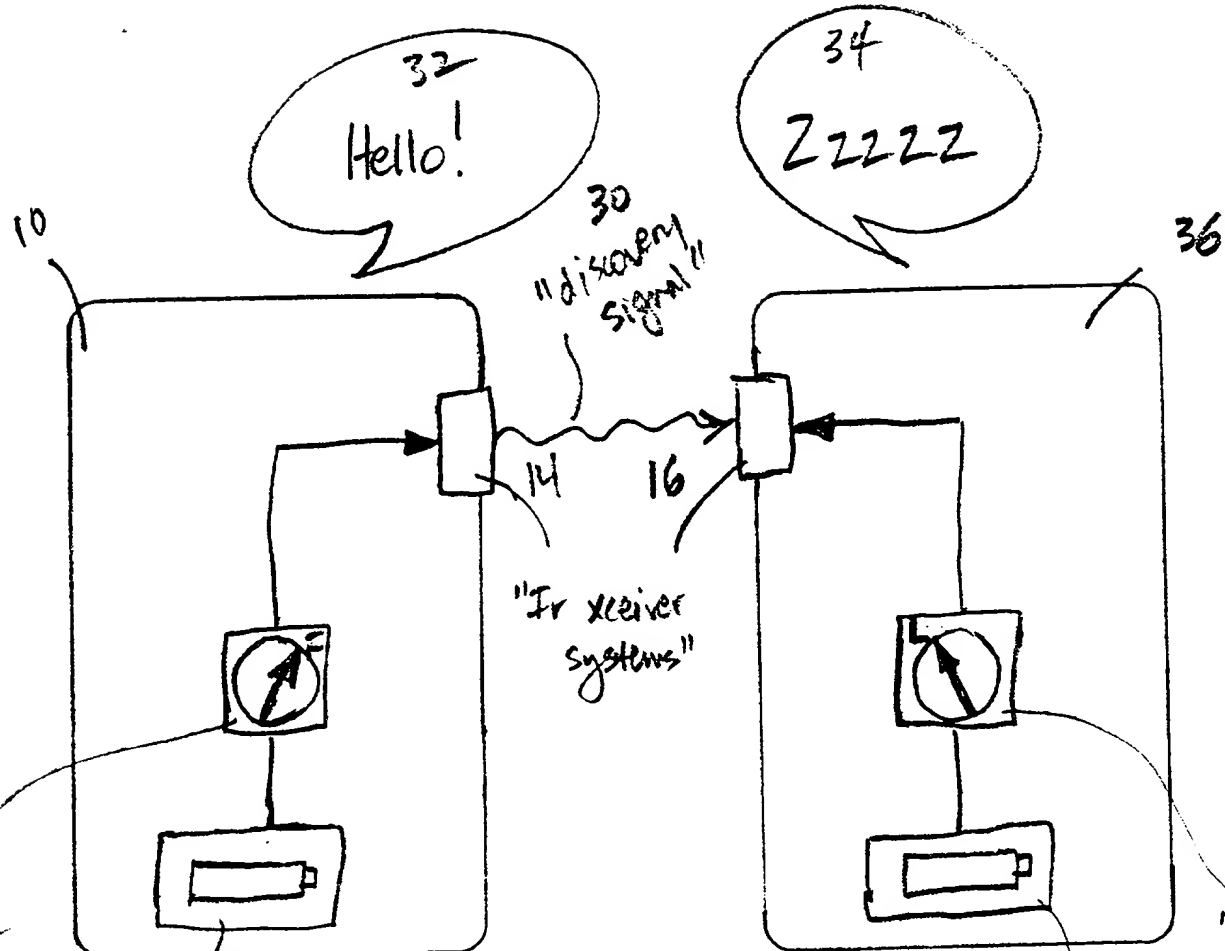


FIGURE 2A

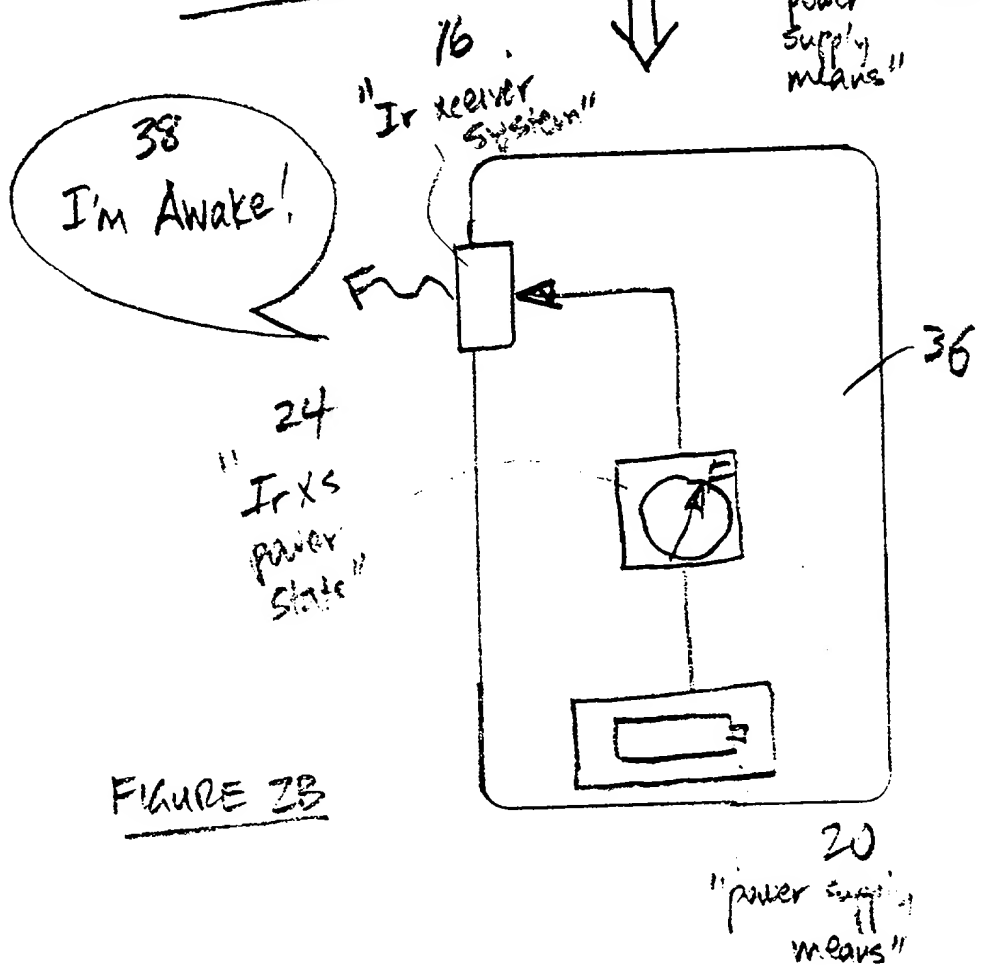


FIGURE 2B

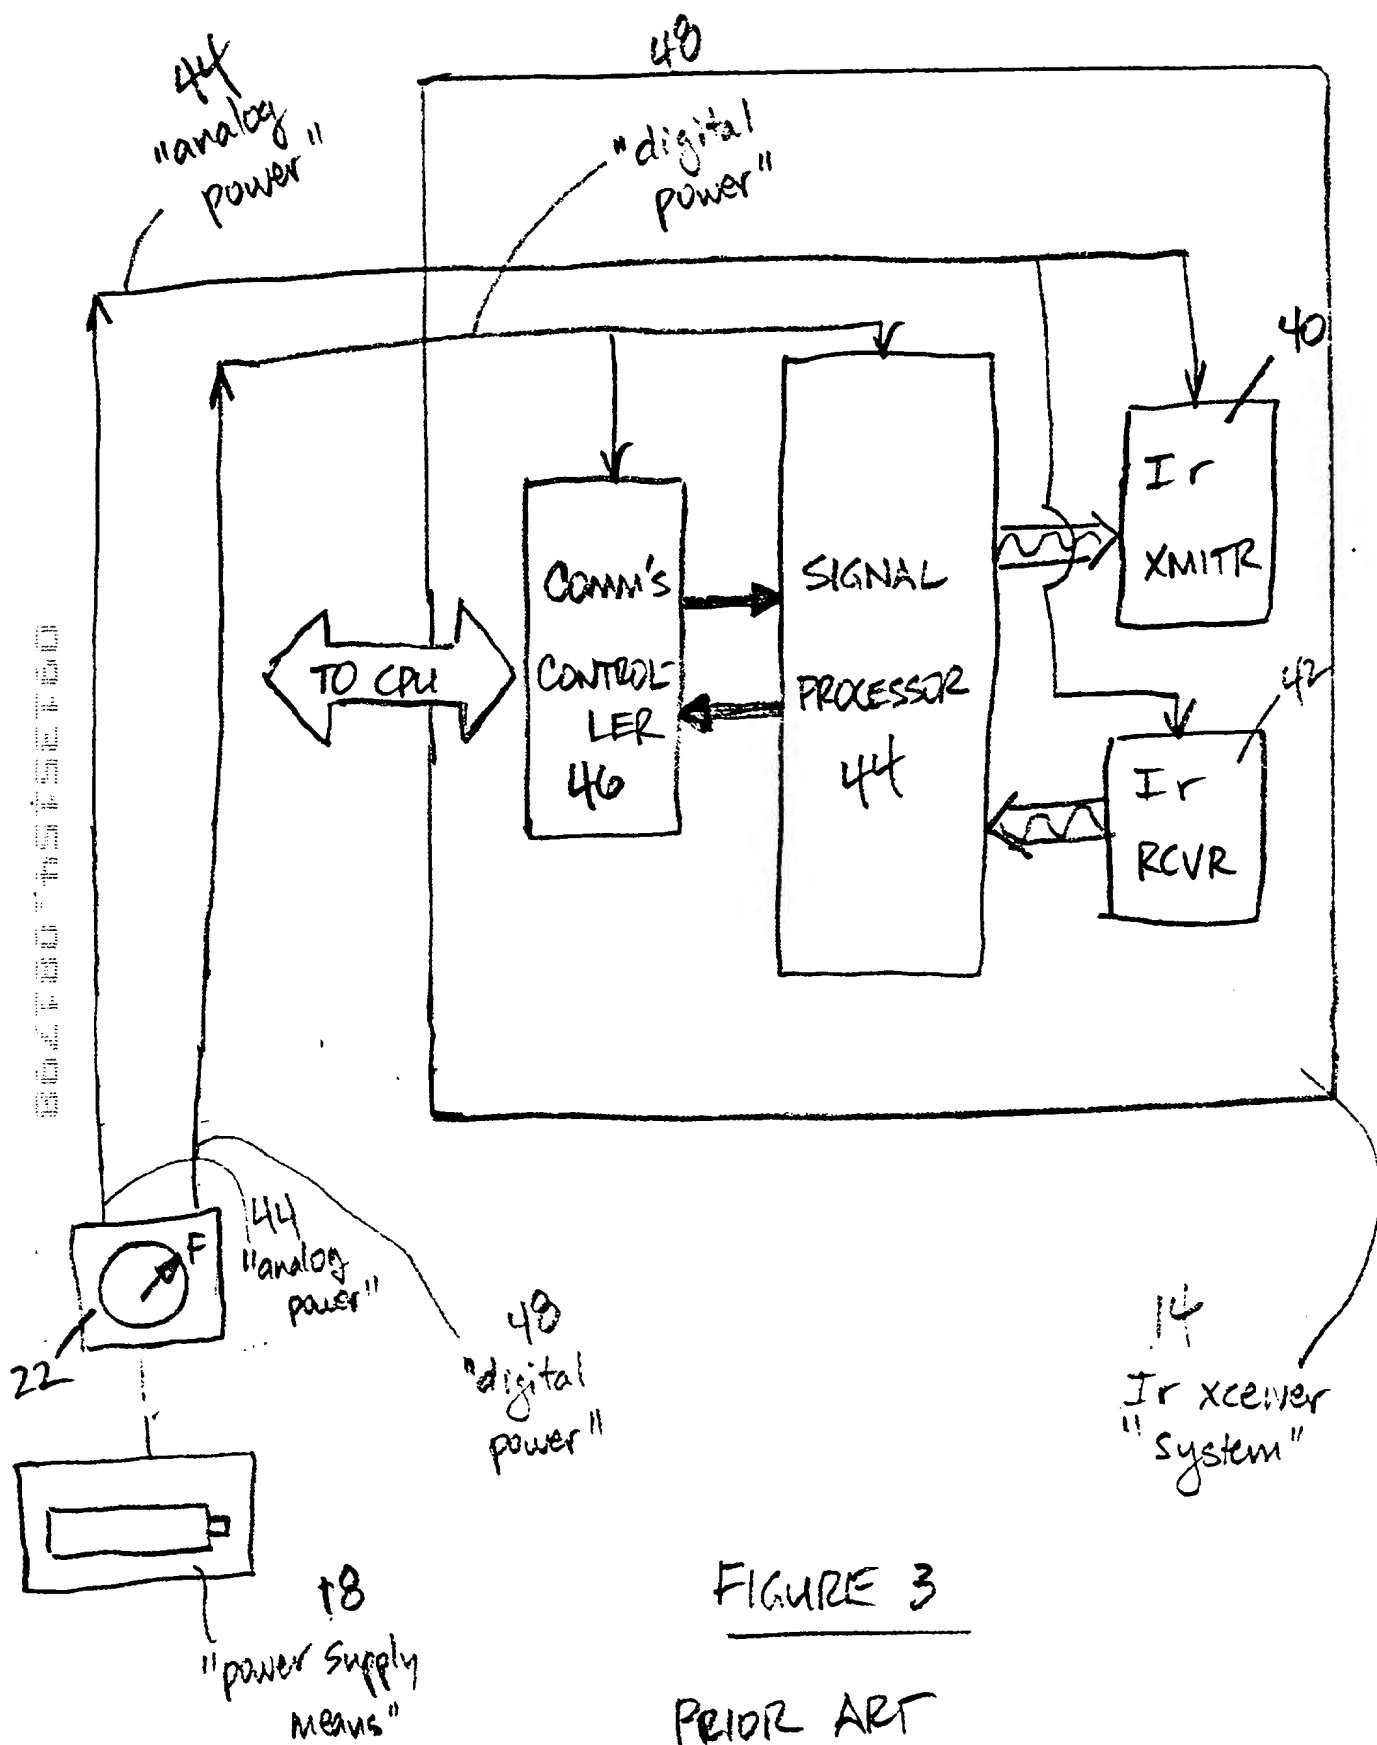
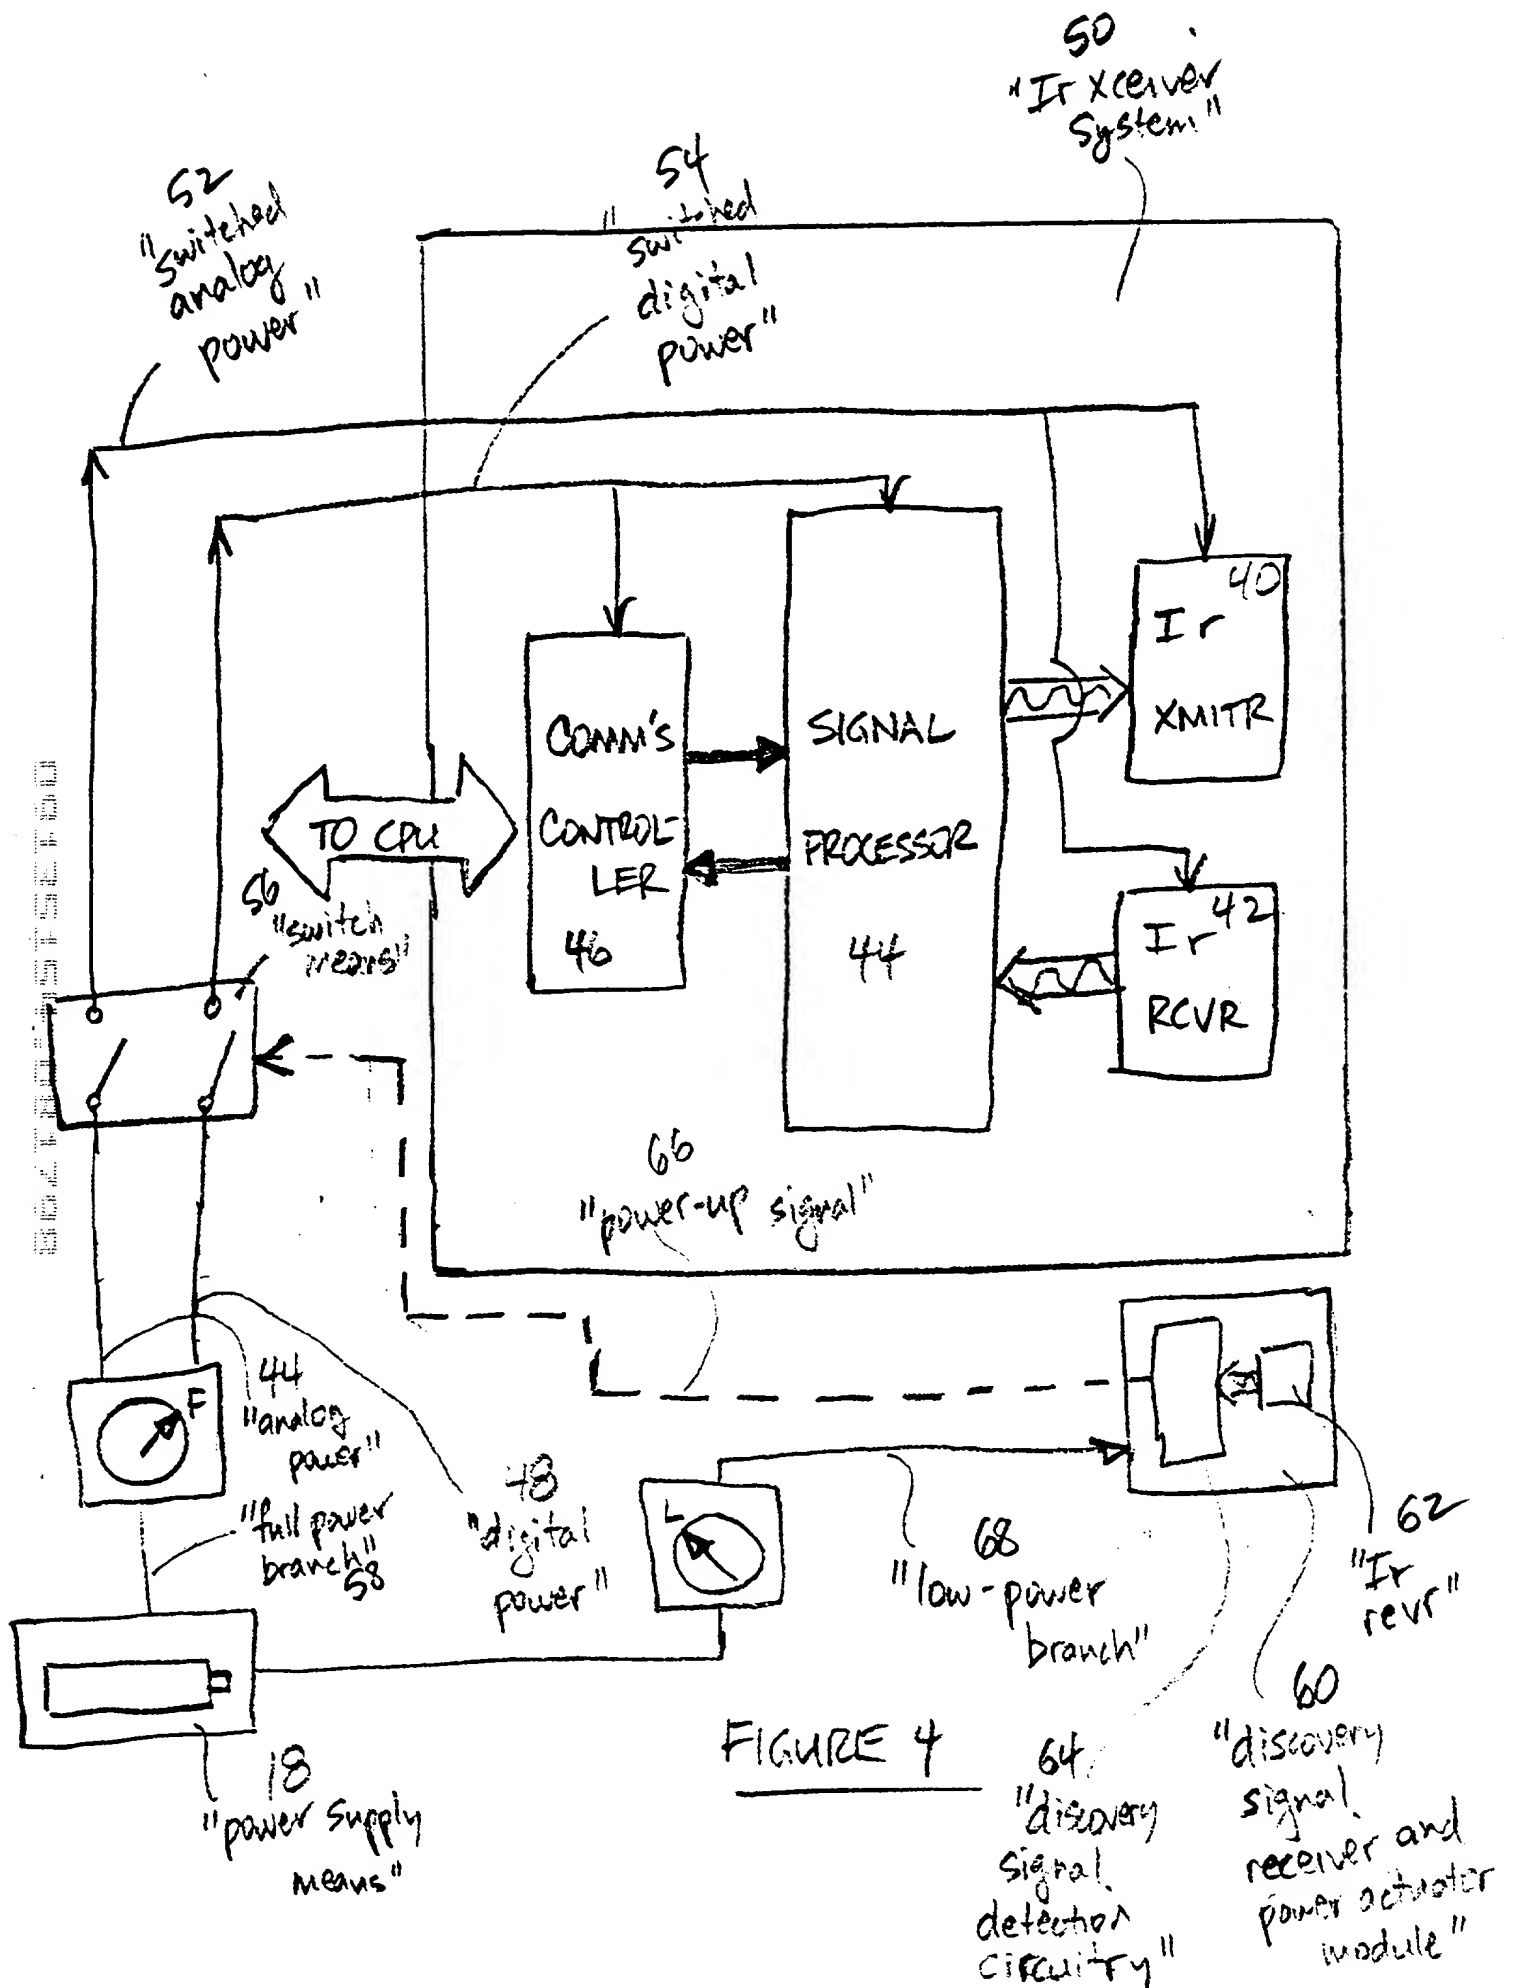


FIGURE 3

PRIOR ART




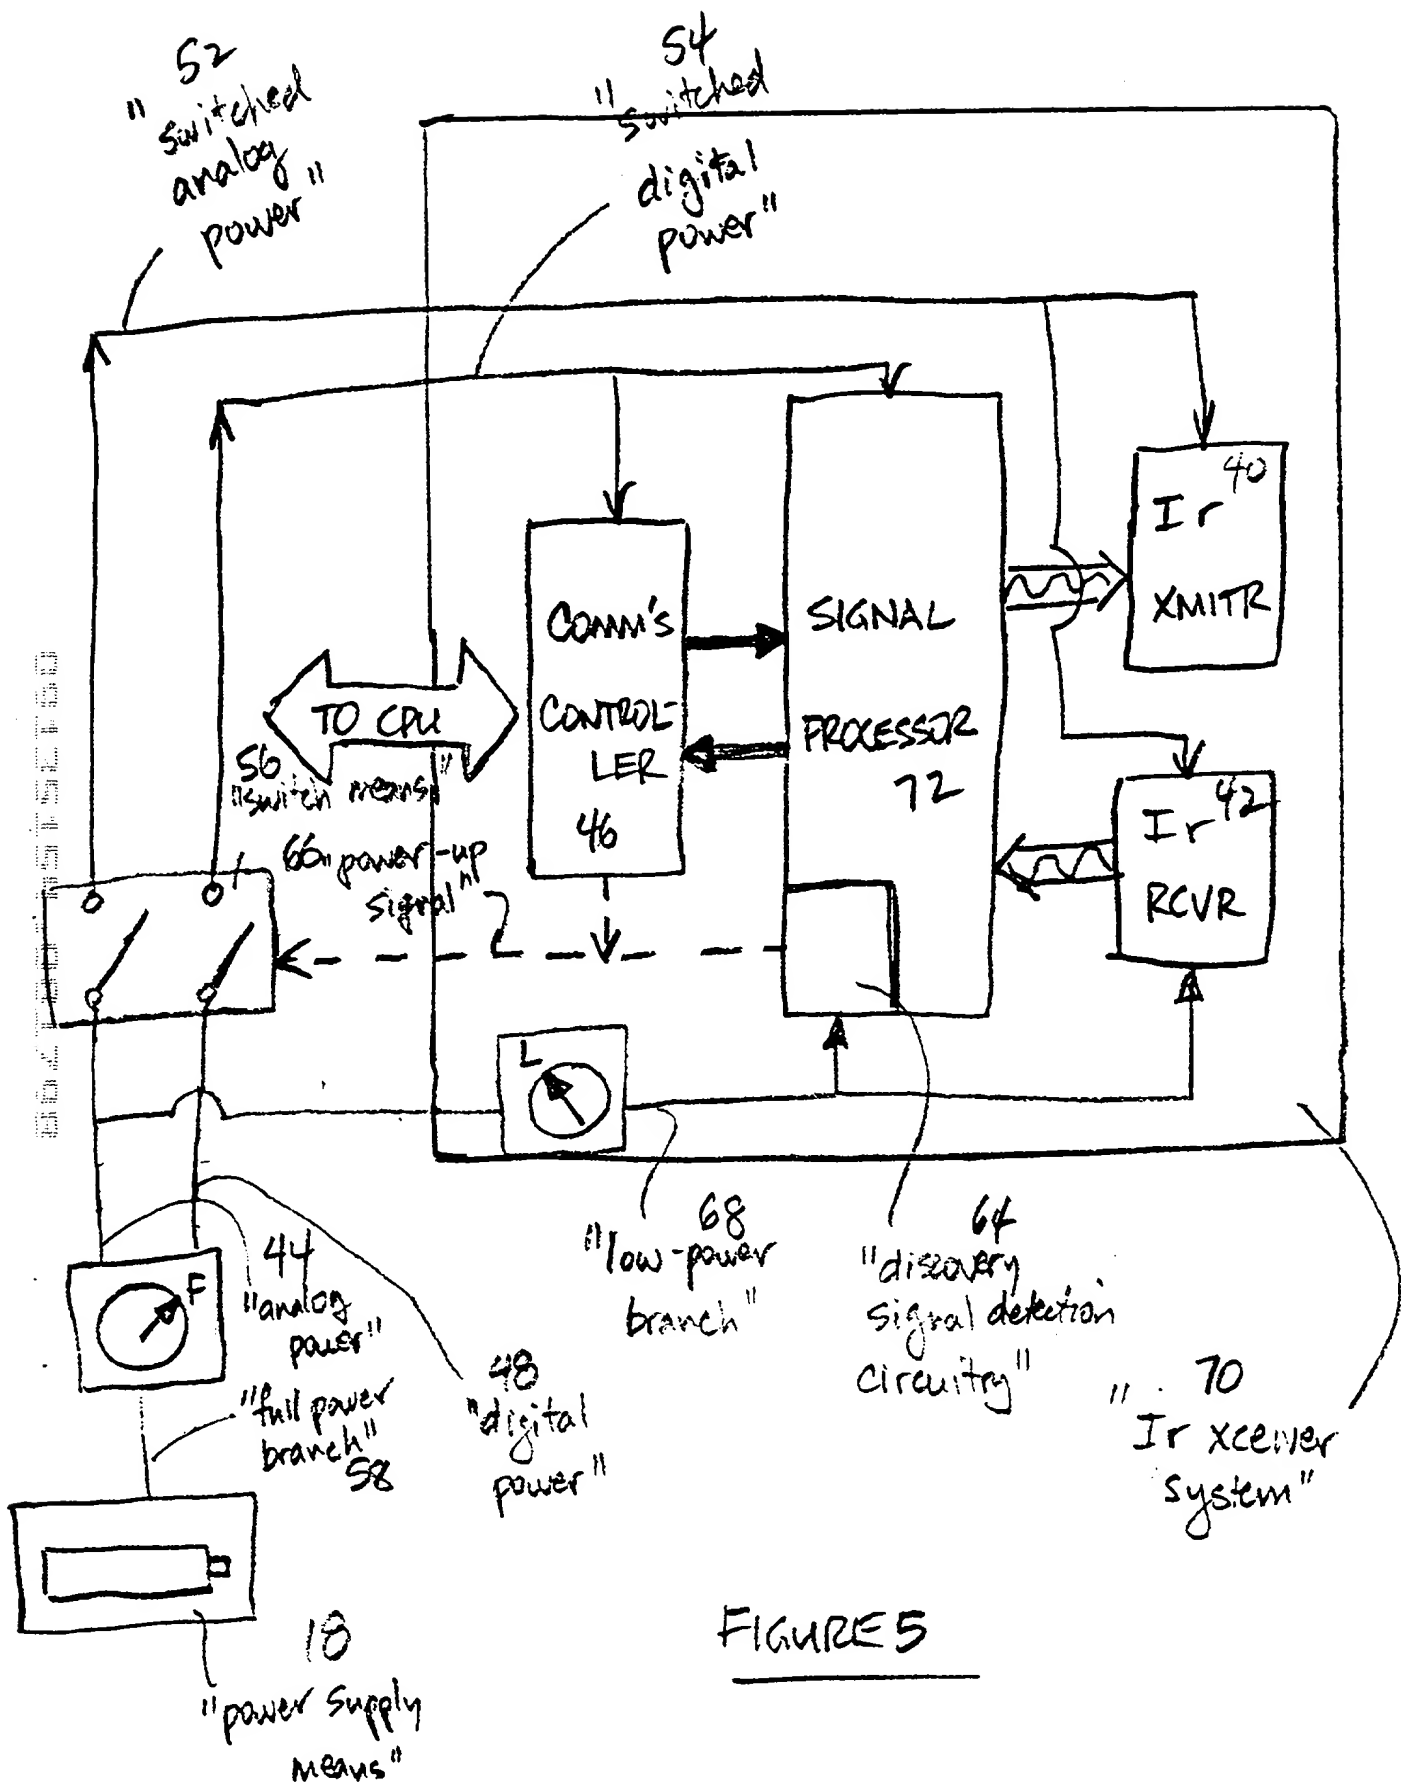


FIGURE 5

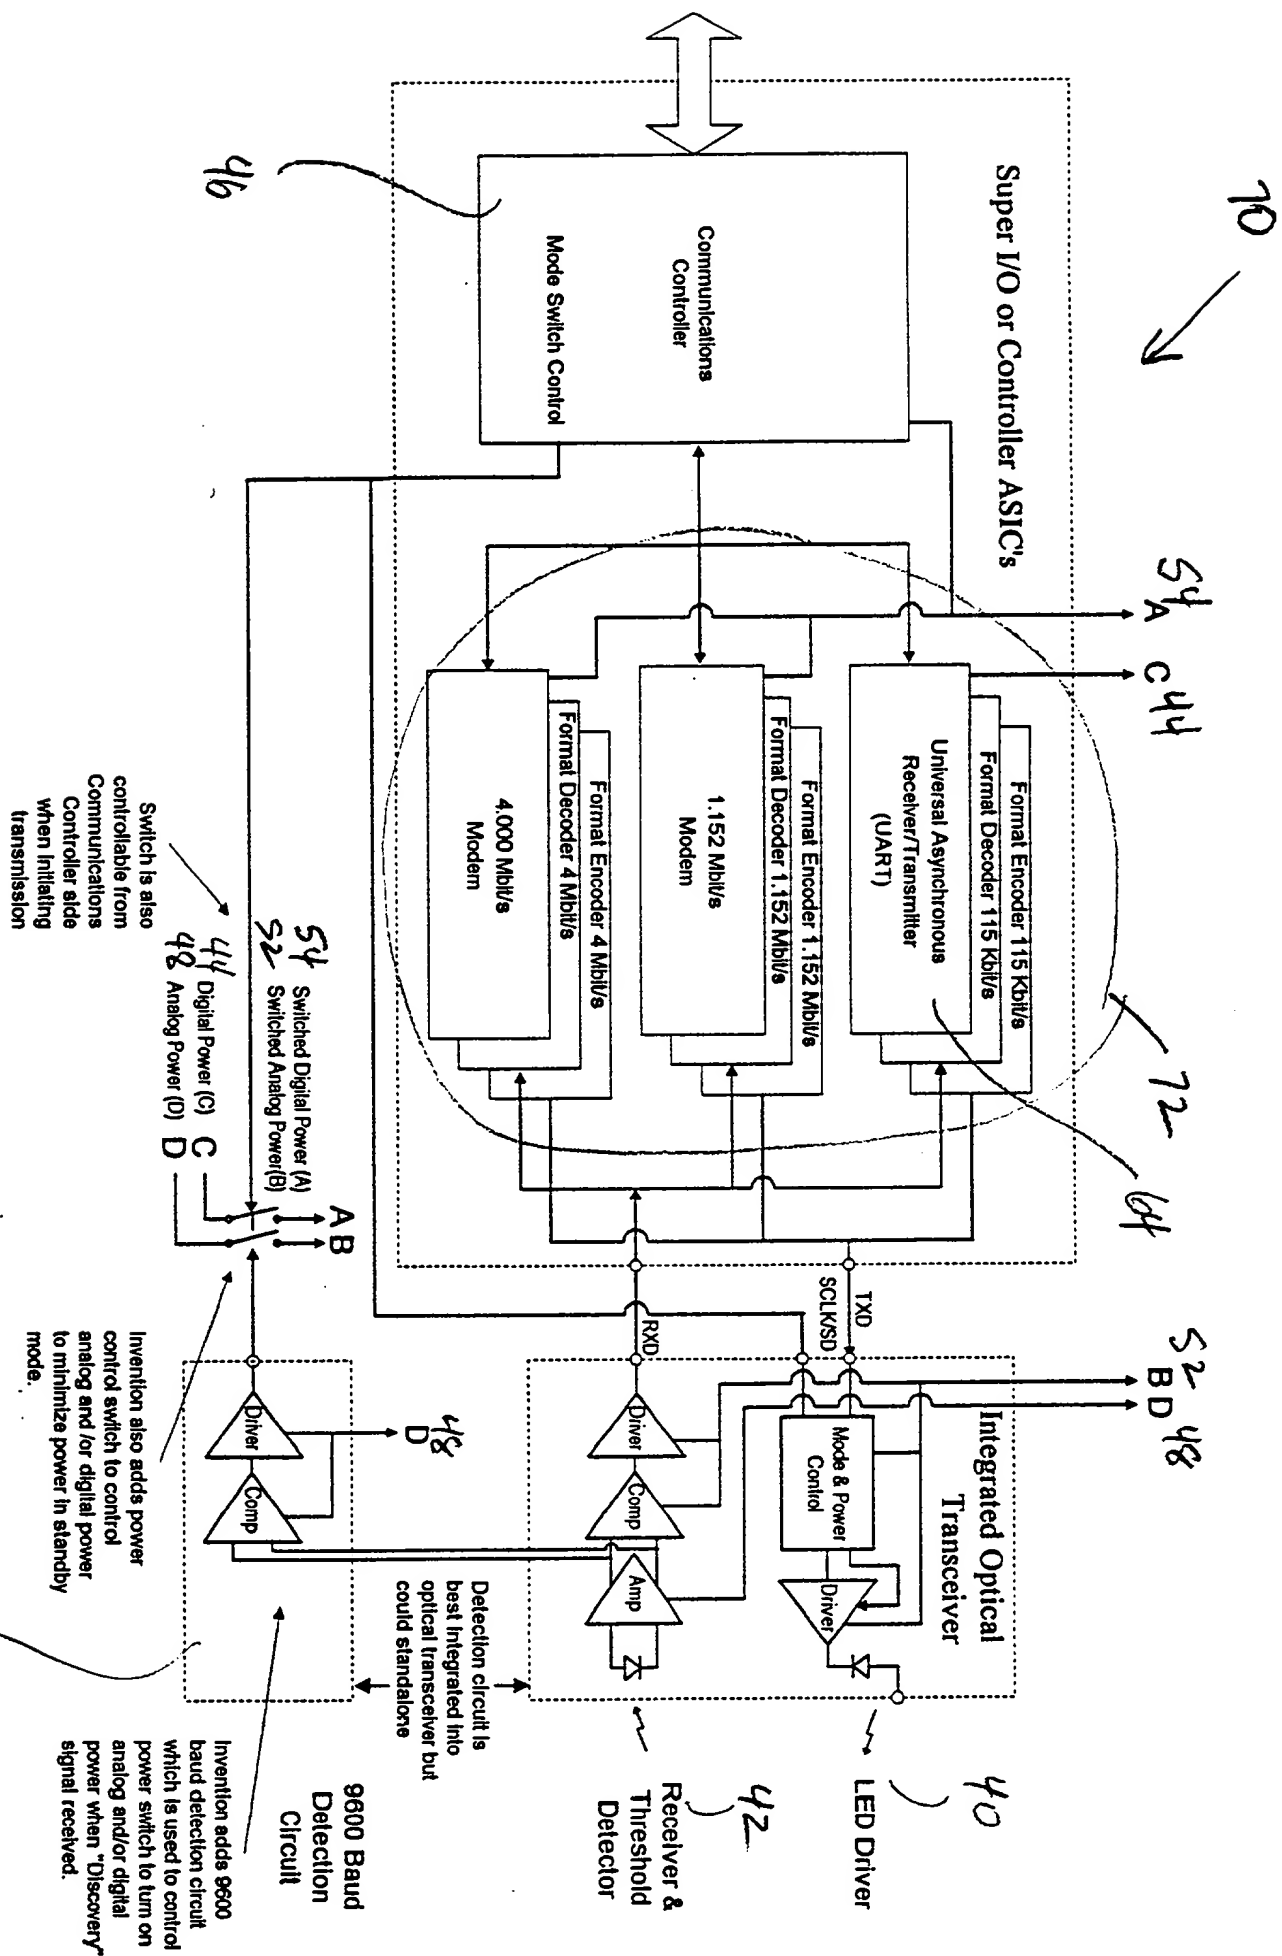

# FIGURE 6

# In the United States Patent and Trademark Office

Applicant: Calibre, Inc.

Title: "Improved Standby Mode for Infrared Data Transceivers"

Docket No.  
CLB5-B73

## Verified Statement Claiming Small Entity Status (37 CFR 1.9(f) & 1.27(c)) -- Small Business Concern

I hereby declare that I am an official of the small business concern empowered to act on behalf of the concern identified below:

NAME OF SMALL BUSINESS CONCERN: Calibre, Inc.

ADDRESS OF SMALL BUSINESS CONCERN: 1762 Technology Drive  
Suite 226  
San Jose, CA 95110-1308

I hereby declare that the above identified small business concern qualifies as a small business concern as defined in 13 CFR 121.12, and reproduced in 37 CFR 1.9(d), for purposes of paying reduced fees to the United States Patent and Trademark Office, in that the number of employees of the concern, including those of its affiliates, does not exceed 500 persons. For purposes of this statement, (1) the number of employees of the business concern is the average over the previous fiscal year of the concern of the persons employed on a full-time, part-time or temporary basis during each of the pay periods of the fiscal year, and (2) concerns are affiliates of each other when either, directly or indirectly, one concern controls or has the power to control the other, or a third party or parties controls or has the power to control both.


I hereby declare that rights under contract or law have been conveyed to and remain with the small business concern identified above with regard to the invention described in the application identified above.

I acknowledge the duty to file, in this application or patent, notification of any change in status resulting in loss of entitlement to small entity status prior to paying, or at the time of paying, the earliest of the issue or any maintenance fee due after the date on which status as a small entity is no longer appropriate. (37 CFR 1.28(b))

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both under section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application, any patent issuing thereon, or any patent to which this verified statement is directed.

7 | 29 | 98

Date



T Allan Hamilton  
President  
Calibre, Inc.  
1762 Technology Drive  
Suite 226  
San Jose, CA 95110-1308  
(408) 573-3892, (408) 573-3899 fax

# In the United States Patent and Trademark Office

Applicants: Calibre, Inc. T. Allan Hamilton

Title: "Improved Standby Mode for Infrared Data Transceivers"

Docket No.  
CLB5-B73

## Declaration in lieu of Oath, 37 CFR 1.68

I, T. Allan Hamilton, of San Jose, CA, am a citizen of Canada and I declare that I believe that I am the first, original and sole inventor of the subject matter which is claimed and for which a patent is sought on the invention described in a specification attached hereto and titled: "Improved Standby Mode for Infrared Data Transceivers."

I have reviewed and I understand the contents of the above-identified specification and claims. I acknowledge a duty to disclose information which is material to the examination of this application in accordance with 37 CFR 1.56(a).

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both under 18 USC 1001, and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

I hereby authorize registered USPTO attorney #40,186, Mr. Karl M. Steins to represent all matters regarding this application and any issuing patent or patents. All correspondence should be directed to:

Send Correspondence to:	Karl M. Steins Steins & Associates 7770 Regents Road #258 San Diego, CA 92122	Direct Telephone Calls to: Karl M. Steins (619) 546-4844
-------------------------	--	--

7/29/98

Date



T. Allan Hamilton  
1762 Technology Drive  
Suite 226  
San Jose, CA 95110-1308  
(408) 573-3892, (408) 573-  
3899 fax